


JACK DOUBLE A-TRACK-TIF

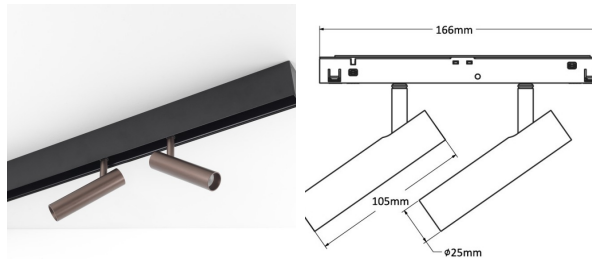

GENERAL INFO

JA**F**/**C**/9**CT**/**R** - Jack

JA2**F**/9**CT**/**R** – Jack²

ATJA**F**/9**CT**/**R** - Jack AT

AT2JA**F**/9**CT**/**R** - Jack 2 AT

ATLJA**F**/9**CT**/**R** - Jack AT LOW

ATL2JA**F**/9**CT**/**R** - Jack 2 AT LOW

F = Finish / C = ceiling base / CT = Color temp. / R = Reflector

Jack is available with O4, I4 and I6 ceiling base.

Jack² always needs a Jackpoint option to plug into.

With Jackpoint Stretch ceiling option there is no canopy visible when Jack² is plugged in.

SPECIFICATIONS

LED LM OUTPUT 2 x 420 lm

POWER CONS. 8,4 W

DRIVE CURRENT 48Vdc

COLOR TEMP 2700K / 3000K

CRI/GAI >90

REFLECTOR 16° - 25° - 48°

FINISH Black (BL) / White (WH) / Brushed Ano (BA) / Bronze (BR) / Gun Metal
Bronze (GM) / Champagne (CH) / Canon Fusil (CF)

REMARK Options: C6004 – Jack Honeycomb option

only dali dimmable