


POWERLINE RECESSED

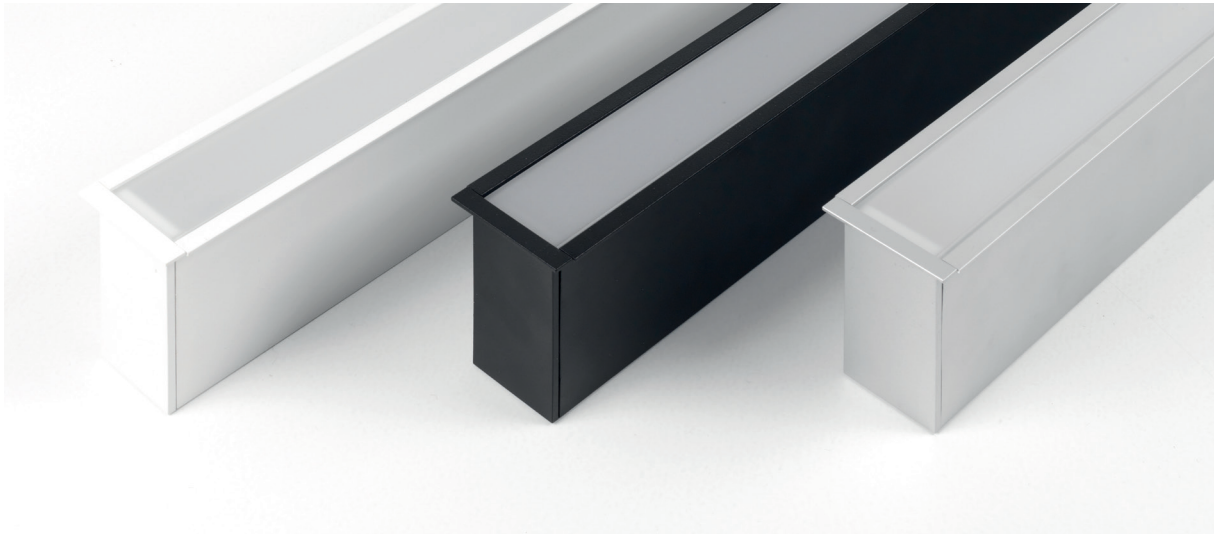

PROFILE COLORS	CRI	CCT	HEIGHT	WIDTH
A anodised aluminium	+80	2.700 K / 827	75	51
W white matt texture RAL9016	+80	3.000 K / 830	75	51
B black matt texture RAL9005	+80	4.000 K / 840	75	51

REMARK: - DALI version = PUSH DIM compatible
- other RAL colors on request

REFERENCE BUILDER: PLR_A/580/830/ND/O

REFERENCE	DIM	POWER CONS (W)	LM OUTPUT (lm)	LENGTH (mm)	CUT-OUT (mm)
Powerline recessed 588 mm					
PLR_/580/___/ND/O	-	13	1.575	588	42 x 582
PLR_/580/___/A/O	1-10 V	13	1.575	588	42 x 582
PLR_/580/___/D/O	DALI	13	1.575	588	42 x 582
Powerline recessed 868 mm					
PLR_/860/___/ND/O	-	19,5	2.362	868	42 x 862
PLR_/860/___/A/O	1-10 V	19,5	2.362	868	42 x 862
PLR_/860/___/D/O	DALI	19,5	2.362	868	42 x 862
Powerline recessed 1.148 mm					
PLR_/1140/___/ND/O	-	26	3.150	1.148	42 x 1.142
PLR_/1140/___/A/O	1-10 V	26	3.150	1.148	42 x 1.142
PLR_/1140/___/D/O	DALI	26	3.150	1.148	42 x 1.142
Powerline recessed 1.428 mm					
PLR_/1420/___/ND/O	-	32,5	3.920	1.428	42 x 1.422
PLR_/1420/___/A/O	1-10 V	32,5	3.920	1.428	42 x 1.422
PLR_/1420/___/D/O	DALI	32,5	3.920	1.428	42 x 1.422
Powerline recessed 1.708 mm					
PLR_/1700/___/ND/O	-	39	4.725	1.708	42 x 1.702
PLR_/1700/___/A/O	1-10 V	39	4.725	1.708	42 x 1.702
PLR_/1700/___/D/O	DALI	39	4.725	1.708	42 x 1.702
Powerline recessed 1.988 mm					
PLR_/1980/___/ND/O	-	45,5	5.500	1.988	42 x 1.982
PLR_/1980/___/A/O	1-10 V	45,5	5.500	1.988	42 x 1.982
PLR_/1980/___/D/O	DALI	45,5	5.500	1.988	42 x 1.982
Powerline recessed 2.268 mm					
PLR_/2260/___/ND/O	-	52	6.300	2.268	42 x 2.262
PLR_/2260/___/A/O	1-10 V	52	6.300	2.268	42 x 2.262
PLR_/2260/___/D/O	DALI	52	6.300	2.268	42 x 2.262