


POWERLINE RECESSED

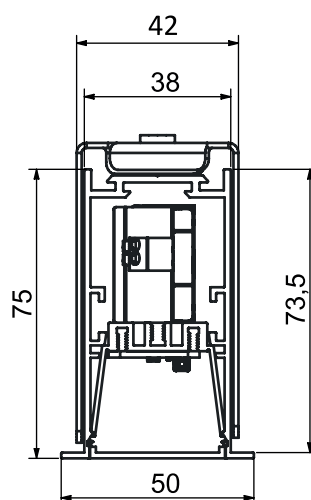

REFERENCE	DIM	POWER CONS (W)	LM OUTPUT (lm)	LENGTH (mm)	CUT-OUT (mm)
Powerline recessed 2.548 mm					
PLR_/2540/___/ND/O	-	58,5	7.080	2.548	42 x 2.542
PLR_/2540/___/A/O	1-10 V	58,5	7.080	2.548	42 x 2.542
PLR_/2540/___/D/O	DALI	58,5	7.080	2.548	42 x 2.542
Powerline recessed 2.828 mm					
PLR_/2820/___/ND/O	-	65	7.860	2.828	42 x 2.882
PL_/2820/___/A/O	1-10 V	65	7.860	2.828	42 x 2.882
PL_/2820/___/D/O	DALI	65	7.860	2.828	42 x 2.882
Powerline recessed 3.108 mm					
PLR_/3100/___/ND/O	-	71,5	8.660	3.108	42 x 3.102
PLR_/3100/___/A/O	1-10 V	71,5	8.660	3.108	42 x 3.102
PLR_/3100/___/D/O	DALI	71,5	8.660	3.108	42 x 3.102
Powerline recessed 3.388 mm					
PLR_/3380/___/ND/O	-	78	9.450	3.388	42 x 3.382
PLR_/3380/___/A/O	1-10 V	78	9.450	3.388	42 x 3.382
PLR_/3380/___/D/O	DALI	78	9.450	3.388	42 x 3.382
Powerline recessed 3.668 mm					
PLR_/3660/___/ND/O	-	83,5	10.240	3.668	42 x 3.662
PLR_/3660/___/A/O	1-10 V	83,5	10.240	3.668	42 x 3.662
PLR_/3660/___/D/O	DALI	83,5	10.240	3.668	42 x 3.662
Powerline recessed 3.948 mm					
PLR_/3940/___/ND/O	-	91	11.025	3.948	42 x 3.942
PLR_/3940/___/A/O	1-10 V	91	11.025	3.948	42 x 3.942
PLR_/3940/___/D/O	DALI	91	11.025	3.948	42 x 3.942
Powerline recessed 4.228 mm					
PLR_/4220/___/ND/O	-	97,5	11.812	4.228	42 x 4.222
PLR_/4220/___/A/O	1-10 V	97,5	11.812	4.228	42 x 4.222
PLR_/4220/___/D/O	DALI	97,5	11.812	4.228	42 x 4.222
Powerline recessed 4.508 mm					
PLR_/4500/___/ND/O	-	104	12.600	4.508	42 x 4.502
PLR_/4500/___/A/O	1-10 V	104	12.600	4.508	42 x 4.502
PLR_/4500/___/D/O	DALI	104	12.600	4.508	42 x 4.502